

WRIST STRAPS

Adjustable, elastic, with silver impregnated threads interwoven on the inside, hypoallergenic

Typical resistance $R < 1 \times 10^3$ ohm (Inner side)
 $R > 1 \times 10^9$ ohm (Outer side)

IEC
EN



Part Nr.	Colour	Connection
2050.750.3 *	light blue	3 mm snap
2050.750.7 *	light blue	7 mm snap
2050.750.10	light blue	10 mm snap
2051.750.3 *	dark blue	3 mm snap
2051.750.10	dark blue	10 mm snap

* LGA tested according to BGI 818 (ZH1/267)



STAINLESS STEEL BAND

Expandable, adjustable band with an insulated shock resistant exterior, protects the wearer from electrical shocks, hypoallergenic

Typical resistance $R < 1 \times 10^3$ ohm (Inner side)
 $R > 1 \times 10^9$ ohm (Outer side)


IEC
EN



Part Nr.	Colour	Connection	Size
2052.750.5.3	black	3 mm snap	adjustable
2052.750.5.10	black	10 mm snap	adjustable

DISPOSABLE WRIST STRAP

Dissipative Nylon wrist strap, ideal for visitors and one time use applications.
 Sizes: length 1,5 m, width 12,5 mm

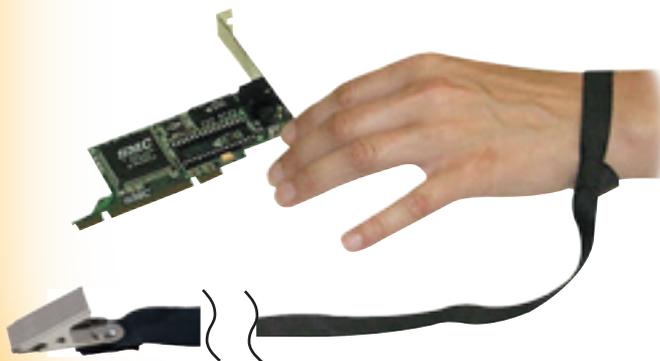

- Black wrist strap with a looped end
- Metal clip for ground connection
- **Do not use with voltages above 250 V**

Typical wearer overall resistance
 $R_{gp} = 10^6 - 10^7$ ohm

IEC
EN

Part Nr.	Quantity
2060.5410.K	1 box = 100 pieces